



5/3-Putni klizni ventil, 1/8" do 1/2" Serija V53V2P




Konstrukcija	5/3-putni klizni ventil, Aktiviranje pneumatski/pneumatski sa povratom oprugom u srednjem položaju
Priključak	G1/8"...G1/2" prema ISO228/1
Materijali	Telo Aluminij, Klizač Niklovani aluminijum, Zaptivke NBR
Način pričvršćivanja	Prolazni provrti u telu ventila
Položaj ugradnje	proizvoljno
Medij	filtrirani i podmazani ili nepodmazani komprimovani vazduh
Temperatura medijuma	0...+40°C
Temperatura okoline	-10...+50°C
Napomena	CAD datoteke dostupne su u STASTO Store na www.stasto.eu


Dijagram protoka



Dijagram protoka 1/8"

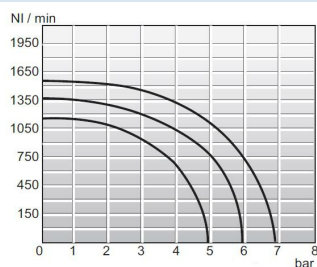


Dijagram protoka 1/4"




Dijagram protoka 1/2"



V52V1P ... Aktiviranje



vertikalna osa: Upravljački pritisak
horizontalna osa: Radni pritisak

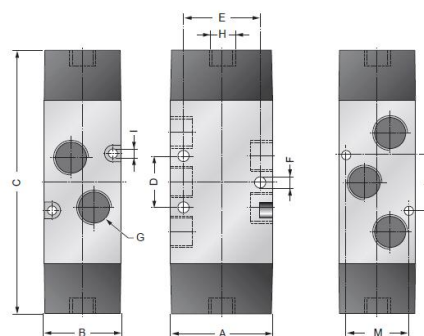

Priključak G	Nazivni prečnik DN [mm]	Opseg pritiska [bar]	Protok*	Centralna pozicija	A	B	C	D	E	F	H	I	L	M	Tip
G1/8"	6	3,2 - 10	530	zatvoreno	30	26	108	18	23	4,25	G1/8	3,25	28,6	20	V53V1P618
G1/8"	6	3,2 - 10	530	otvoreno	30	26	108	18	23	4,25	G1/8	3,25	28,6	20	V53V1P918
G1/4"	8	3,2 - 10	750	zatvoreno	40	30	105	20	30	4,25	G1/8	3,25	21	24,6	V53V1P614
G1/4"	8	3,2 - 10	750	otvoreno	40	30	105	20	30	4,25	G1/8	3,25	21	24,6	V53V1P914
G1/2"	15	3,2 - 10	3200	zatvoreno	60	40	192	40	50	5,5	G1/8	-	-	-	V53V1P612
G1/2"	15	3,2 - 10	3200	otvoreno	60	40	192	40	50	5,5	G1/8	-	-	-	V53V1P912

*Referentni pritisak 6 bar, Referentna temperatura 20°C

Ilustracije neobavezujuće

Zadržavamo pravo na konstruktivne, dimenzione i promene materijala

Pneumatika / Pneumatski razvodnici - električni/pneumatski / 3/2- 5/2- 5/3 razvodnik - Serija E+V (dimenzija konektora 22mm) / 5/3-razvodnik serije V5

Verzija 7

138302 / Generisano 2026/38 SR

PROIZVEDENO U EVROPI

+381 11 2399521

balkan@stasto.eu

© STASTO Automatizacija d.o.o.

www.stasto.rs

Otvori seriju online

Strana 2 / 2

