


Multikobling Serie COM



Konstruktionstype	Multikobling, fri gennemgang
Tilslutning	Push-in fittings 4mm, 6mm hhv. 8mm
Materialer	Hus glasfiberforstærket højtydende plastmateriale, Tætninger NBR, Seegerringe stål, Push-in fittings messing forniklet
anbefalet Slangematerialer	Polyamid (PA), Polyurethan (CPU/PU), Polyethylen (PE)
Medium	Trykluft, neutrale gasser
Medietemperatur	-20...+70°C
maks. driftstryk	15bar

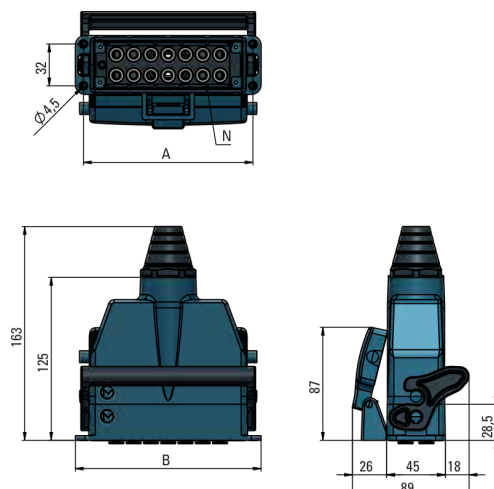

Slangediameter [mm]	N Antal koblinger	A	B	Vægt [g]	Type
4	12	103	115,5	612	COM-PI12X04-N-A
4	20	129,5	142,5	825	COM-PI20X04-N-A
6	10	103	115,5	718	COM-PI10X06-N-A
6	14	129,5	142,5	923	COM-PI14X06-N-A
8	8	103	115,5	656	COM-PI8X08-N-A
8	10	129,5	142,5	801	COM-PI10X08-N-A

Illustrationer ikke bindende
Konstruktions-, mål- og materialændringer forbeholdes

