

Dugós csatlakozók "Push-In"


Nikkelezett sárgaréz

Sorozat PI




Kivitel	Dugaszolható csatlakozó O-gyűrűvel és rögzítőfogóval műanyag tömlők csatlakoztatásához
Csatlakozás	R1/8" ... R3/4" ISO7/1 szerint Menet PTFE-bevonatú, G1/8" ... G3/4" ISO228/1 szerint, M3...M5 az ISO R/262 szerint
Cső külső átmérője	3...16mm
Anyagok	Testház Nikkelezett sárgaréz, Befogópatron Rozsdamentes acél 1.4310, Tömítések NBR
ajánlott Csőanyagok	Poliamid (PA), Poliuretán (CP/PU), Polietilén (PE), PTFE (PT)
Csőtűrések	+/- 0,07mm átmérőig 10mm, +/- 0,1mm átmérőtől 12mm
Közeg	Sűrített levegő, semleges gázok
Közeg hőmérséklete	-20...80°C
Üzemi nyomás	-0,99...20bar, az alkalmazott cső maximális nyomásától függően
Különleges kivitel	FKM O-gyűrű -20...150°C, kémiaileg nikkelezett, NSF, FDA kérésre

PI10 Benyomható patron használható műanyag, sárgaréz vagy alumínium házból készült kivitelekhez


	Ø	D1	L1	Tömeg [g]	Típus
	4	9,3	14,5	3,6	PI10-04-N
	6	11,5	16,5	5,7	PI10-06-N
	8	13,7	17	7,9	PI10-08-N
	10	15,8	19	10,3	PI10-10-N



PI10 Vázlat a préselt illesztéshez


	Ø	D1	D2	D3	D4	L1	L2	Típus
	4	9,5	9,2	3	8,6	12	3,2	PI10-04-N
	6	11,7	11,4	5	10,8	14	4	PI10-06-N
	8	13,9	13,6	7	13	14,5	4	PI10-08-N
	10	16	15,7	9	15,1	16	4	PI10-10-N

PI11-360 Forgatható könyök becsavarható csatlakozó idom - két L-gyűrűdarabbal

	Ø	D1	D2	D3	L1	L2	L3	L4	L5	CH	Tömeg [g]	Típus
	4	M5x0,8	9	10	4	11	18,5	29,2	10	3	18,5	PI11-04-M5-N-0-360
	4	G1/8"	9,1	14	5	15	20,5	40,4	15	4	40	PI11-04-18-N-0-360
	6	G1/8"	12	14	5	15	22,5	40,4	15	4	46	PI11-06-18-N-0-360
	6	G1/4"	12	18	6,5	17,5	24	46,1	17	5	69,5	PI11-06-14-N-0-360
	8	G1/8"	14	14	5	15	23,5	40,4	15	4	50	PI11-08-18-N-0-360
	8	G1/4"	14	18	6,5	17,5	24,5	46	17	5	69,5	PI11-08-14-N-0-360



PI12 Egyenes becsavarható csatlakozó idom - Hengeres menet




Ø	D1	D2	D3	L1	L2	CH1	CH2	Tömeg [g]	Típus
3	M3x0,5	7	5,6	3	14,5	-	1,5	1,4	PI12-03-M3-N-0
3	M5x0,8	7	8	4	15	-	2	2,3	PI12-03-M5-N-0
4	M5x0,8	9	8	4	19	-	2,5	4,4	PI12-04-M5-N-0
4	M6x1	9	9	4,5	19,5	-	3	4,3	PI12-04-M6-N-0
4	G1/8"	9	13	5	16,5	9	3	6,1	PI12-04-18-N-0
4	G1/4"	9	16	6,5	18,5	9	3	12	PI12-04-14-N-0
6	M5x0,8	12	8	4	22	-	2,5	8,6	PI12-06-M5-N-0
6	M6x1	12	9	4,5	22,5	-	3	8,9	PI12-06-M6-N-0
6	M12x1,25	12	15	6,5	21	12	4	11,8	PI12-06-M12X1,25-N-0
6	M12x1,5	12	15	6,5	21	12	4	12,9	PI12-06-M12X1,5-N-0
6	G1/8"	12	13,5	5	19,5	12	4	9,1	PI12-06-18-N-0
6	G1/4"	12	16	6,5	19,5	12	4	12,7	PI12-06-14-N-0
6	G3/8"	12	20	7	20,5	12	4	-	PI12-06-38-N-0
6	G1/2"	12	25	8,5	22,5	12	4	-	PI12-06-12-N-0
8	G1/8"	14	14,5	5	23,5	13	6	11,5	PI12-08-18-N-0
8	G1/4"	14	16	6,5	21,5	14	6	13,9	PI12-08-14-N-0
8	G3/8"	14	20	7	21	14	6	20,1	PI12-08-38-N-0
8	G1/2"	14	25	8,5	23	14	6	34,3	PI12-08-12-N-0
10	G1/8"	16	13	5	26,5	15	8		PI12-10-18-N-0-YA
10	G1/4"	16	16,5	6,5	27,5	15	8	17,5	PI12-10-14-N-0
10	G3/8"	16	20	7	25	16	8	22,6	PI12-10-38-N-0
10	G1/2"	16	25	8,5	25,5	16	8	34,5	PI12-10-12-N-0
12	G1/4"	19	21	6,5	28,5	19	8	26,2	PI12-12-14-N-0
12	G3/8"	19	21	7	28,5	19	10	29	PI12-12-38-N-0
12	G1/2"	19	25	8,5	26,5	19	10	36,1	PI12-12-12-N-0
14	G3/8"	22	25	7	32	22	10	37,5	PI12-14-38-N-0
14	G1/2"	22	25	8,5	32	22	12	42,4	PI12-14-12-N-0
16	G1/2"	24	28	8,5	34,5	25	13	53,6	PI12-16-12-N-0-YA
16	G3/4"	24	28	9,5	32	24	13	68,2	PI12-16-34-N-0



PI12C Egyenes becsavarható csatlakozó idom - Kúpos menet


Ø	D1	D2	L1	L2	CH1	CH2	Tömeg [g]	Típus
4	R1/8"	9	7,5	16	10	3	5,5	PI12C-04-18-N-T
4	R1/4"	9	11	20,5	14	3	16,1	PI12C-04-14-N-T
6	R1/8"	12	7,5	21	12	4	8,7	PI12C-06-18-N-T
6	R1/4"	12	11	20,5	14	4	15,8	PI12C-06-14-N-T
6	R3/8"	12	11,5	21	17	4	-	PI12C-06-38-N-T-YA
8	R1/8"	14	7,5	25	14	6	13,2	PI12C-08-18-N-T
8	R1/4"	14	11	23,5	14	6	13,9	PI12C-08-14-N-T
8	R3/8"	14	11,5	22,5	17	6	23,6	PI12C-08-38-N-T
8	R1/2"	14	14	25	22	6	-	PI12C-08-12-N-T
10	R1/8"	16	7,5	28	16	6	-	PI12C-10-18-N-T
10	R1/4"	16	11	30,5	16	8	20,2	PI12C-10-14-N-T
10	R3/8"	16	11,5	24	17	8	20	PI12C-10-38-N-T
10	R1/2"	16	14	27	22	8	47,5	PI12C-10-12-N-T
12	R1/4"	19	11	32	19	8	28,5	PI12C-12-14-N-T
12	R3/8"	19	11,5	27,5	19	10	24,1	PI12C-12-38-N-T
12	R1/2"	19	14	27,5	22	10	42,3	PI12C-12-12-N-T
14	R3/8"	22	11,5	35,5	22	10	40,1	PI12C-14-38-N-T
14	R1/2"	22	14	32,5	22	12	39,5	PI12C-14-12-N-T

PI12 Szűkítő idom


	Ø	D1	D2	L1	Tömeg [g]	Típus
	3	4	7	27	2,5	PI12-03-04-N
	4	6	9	33,5	7	PI12-04-06-N
	4	8	9	33,5	10	PI12-04-08-N
	4	10	10	31,5	15	PI12-04-10-N
	4	12	12	32,5	24,5	PI12-04-12-N
	6	4	12	35,5	10	PI12-06-04-N
	6	8	12	35	11,5	PI12-06-08-N
	6	10	12	36,5	16,5	PI12-06-10-N
	6	12	12	35,5	22,2	PI12-06-12-N
	6	14	14	37,5	25	PI12-06-14-N
	8	6	14	39,5	13,5	PI12-08-06-N
	8	10	14	37	15	PI12-08-10-N
	8	12	14	39	23	PI12-08-12-N
	8	14	14	38,5	31,5	PI12-08-14-N
	10	12	16	42	20	PI12-10-12-N
	10	14	16	42	29,5	PI12-10-14-N
	12	14	19	43	24	PI12-12-14-N
	14	16	22	49,5	91,8	PI12-14-16-N




PI13 Egyenes becsavarható csatlakozó idom

	Ø	D1	D2	D3	L1	L2	CH	Tömeg [g]	Típus
	4	G1/8"	9	13	7,5	23,5	9	10	PI13-04-18-N
	6	G1/8"	12	14	7,5	26	12	15,1	PI13-06-18-N
	6	G1/4"	12	16	11	30	12	18,5	PI13-06-14-N
	8	G1/8"	14	13	7,5	26	14	17,5	PI13-08-18-N
	8	G1/4"	14	16	11	30	14	20,2	PI13-08-14-N
	8	G3/8"	14	20	12	31	14	25,9	PI13-08-38-N
	10	G1/4"	16	16	11	32	16	24,4	PI13-10-14-N
	10	G3/8"	16	20	12	33,5	16	30,3	PI13-10-38-N
	10	G1/2"	16	25	13,5	36,5	16	45	PI13-10-12-N
	12	G3/8"	19	23,1	11	34	20	38,3	PI13-12-38-N-YA
	12	G1/2"	18,8	25	11	37	19	50,9	PI13-12-12-N-YA

PI13 Egyenes csatlakozó

	Ø 1	Ø 2	D1		L1	Tömeg [g]	Típus
	3	3	6,5	6,5	22,5	2,7	PI13-03-N
	4	4	9	9	28	6,8	PI13-04-N
	6	6	12	12	33,5	15	PI13-06-N
	6	4	12	12	31	14,7	PI13-06-04-N
	8	8	14	14	34	18	PI13-08-N
	8	6	14	14	34	21	PI13-08-06-N
	10	10	16	16	38,5	22,5	PI13-10-N
	10	8	16	16	36,5	25,2	PI13-10-08-N
	12	12	19	19	41	37	PI13-12-N
	12	8	19	14	39	-	PI13-12-08-N
	12	10	19	16	40,5	-	PI13-12-10-N
	14	14	22	22	47	47,4	PI13-14-N
	14	12	22	19	44,5	-	PI13-14-12-N-YA
	16	16	24	24	47	63,2	PI13-16-N
	16	12	24	19	44,5	-	PI13-16-12-N
	16	14	24	22	47	-	PI13-16-14-N

PI14-360 Forgatható könyök becsavarható csatlakozó idom - Hengeres menet

	Ø	D1	D2	D3	L1	L2	L3	L4	CH	Tömeg [g]	Típus
	3	M3x0,5	7	7	3	8,5	13	14	2	4,6	PI14-03-M3-N-0-360
	3	M5x0,8	7	10	4	11	14,5	19	3	8,1	PI14-03-M5-N-0-360
	4	M5x0,8	9	10	4	11	18,5	19	3	10,1	PI14-04-M5-N-0-360
	4	G1/8"	9	14	5	15	20,5	25,5	4	22,2	PI14-04-18-N-0-360
	6	M5x0,8	12	10	4	11	21,5	19	3	13,3	PI14-06-M5-N-0-360
	6	G1/8"	12	14	5	15	22,5	25,5	4	24,4	PI14-06-18-N-0-360
	6	G1/4"	12	18	6,5	17,5	24	29	5	39,3	PI14-06-14-N-0-360
	8	G1/8"	14	14	5	15	23,5	25,5	4	25,7	PI14-08-18-N-0-360
	8	G1/4"	14	18	6,5	17,5	24,5	29	5	39,1	PI14-08-14-N-0-360
	10	G1/4"	16	18	6,5	17,5	27	29	5	43,6	PI14-10-14-N-0-360
	10	G3/8"	16	22	7	19,5	29	32,5	6	62,2	PI14-10-38-N-0-360
	12	G3/8"	19	22	7	19,5	29,5	32,5	6	67,1	PI14-12-38-N-0-360
	12	G1/2"	19	26	8,5	24	31,5	39,5	8	114,8	PI14-12-12-N-0-360




PI15-360 Forgatható T-becsavarható csatlakozó idom - két T-gyűrűdarabbal

	Ø	D1	D2	D3	L1	L2	L3	L4	L5	CH	Tömeg [g]	Típus
	4	M5x0,8	9	10	4	11	38	29	10	3	25	PI15-04-M5-N-0-360
	4	G1/8"	9	14	5	15	41	40,5	15	4	50	PI15-04-18-N-0-360
	6	G1/8"	12	14	5	15	45	40,5	15	4	59	PI15-06-18-N-0-360
	6	G1/4"	12	18	6,5	17,5	48	46	17	5	82	PI15-06-14-N-0-360
	8	G1/8"	14	14	5	15	47	40,5	15	4	61	PI15-08-18-N-0-360
	8	G1/4"	14	18	6,5	17,5	49	46	17	5	83,5	PI15-08-14-N-0-360




PI16-360 Forgatható könyök becsavarható csatlakozó idom - Hengeres menet




Ø	D1	D2	D3	L1	L2	L3	CH	Tömeg [g]	Típus
3	M5x0,8	7	10	4	14	14	9	7,1	PI16-03-M5-N-0-360
4	M5x0,8	9	10	4	14	17,5	9	8,8	PI16-04-M5-N-0-360
4	M6x1	9	10	4,5	14,5	17,5	9	8,7	PI16-04-M6-N-0-360
4	G1/8"	9	14,5	5	18,2	19,5	13	15,7	PI16-04-18-N-0-360
4	G1/4"	9	16	6,5	21,7	19,5	13	19	PI16-04-14-N-0-360
6	M5x0,8	12	10	4	14	20,5	9	11,9	PI16-06-M5-N-0-360
6	M6x1	12	10	4,5	14,5	20,5	9	12	PI16-06-M6-N-0-360
6	M12x1,25	12	15	6,5	21,7	22	13	22	PI16-06-M12X1,25-N-0-360
6	M12x1,5	12	15	6,5	21,7	22	13	21,5	PI16-06-M12X1,5-N-0-360
6	G1/8"	12	14,5	5	18	22	13	18,5	PI16-06-18-N-0-360
6	G1/4"	12	16	6,5	21,7	22	13	22	PI16-06-14-N-0-360
6	G3/8"	12	20	7	22,2	22	13	-	PI16-06-38-N-0-360
6	G1/2"	12	25	8,5	24,2	22	13	-	PI16-06-12-N-0-360
8	G1/8"	14	14,5	5	18	22,5	13	22	PI16-08-18-N-0-360
8	G1/4"	14	16	6,5	21,5	22,5	13	26	PI16-08-14-N-0-360
8	G3/8"	14	20	7	25,5	23	16	36,8	PI16-08-38-N-0-360
8	G1/2"	14	25	8,5	27,5	23	16	41	PI16-08-12-N-0-360
10	G1/8"	16	18	5	20,5	26	16	-	PI16-10-18-N-0-360-YC
10	G1/4"	16	18	6,5	22	26	16	32,5	PI16-10-14-N-0-360
10	G3/8"	16	20	7	25,5	26	16	39,5	PI16-10-38-N-0-360
10	G1/2"	16	25	8,5	27,5	26	16	43,2	PI16-10-12-N-0-360
12	G1/4"	19	22,5	6,5	25,5	28,5	20	58,5	PI16-12-14-N-0-360
12	G3/8"	19	22,5	7	26	28,5	20	57	PI16-12-38-N-0-360
12	G1/2"	19	25	8,5	30,5	28,5	20	65,1	PI16-12-12-N-0-360
14	G3/8"	22	22,5	7	26	32	20	61,6	PI16-14-38-N-0-360
14	G1/2"	22	25	8,5	30,5	32	20	68,5	PI16-14-12-N-0-360
16	G1/2"	24	27	8,5	33	36,5	25	105,2	PI16-16-12-N-0-360
16	G3/4"	24	32	9,5	35	36,5	25	113,8	PI16-16-34-N-0-360




PI16C-360 Forgatható könyök becsavarható csatlakozó idom - Kúpos menet

	Ø	D1	D2	D3	L1	L2	L3	CH	Tömeg [g]	Típus
	4	R1/8"	9	11,2	7,5	17,9	19,5	10	10,8	PI16C-04-18-N-T-360
	4	R1/4"	9	15,5	11	24	19,5	14	20,9	PI16C-04-14-N-T-360
	6	R1/8"	12	14,5	7,5	20	22	13	19,4	PI16C-06-18-N-T-360
	6	R1/4"	12	15,5	11	24	22	14	24	PI16C-06-14-N-T-360
	6	R3/8"	12	20	11,5	25	22	18	-	PI16C-06-38-N-T-360
	8	R1/8"	14	14,5	7,5	20	22,5	13	23	PI16C-08-18-N-T-360
	8	R1/4"	14	15,5	11	24	22,5	14	26,4	PI16C-08-14-N-T-360
	8	R3/8"	14	20	11,5	27	23	18	39,2	PI16C-08-38-N-T-360
	8	R1/2"	14	24,5	14	31	23	22	-	PI16C-08-12-N-T-360
	10	R1/8"	16	20	7,5	26,5	23	18	-	PI16C-10-18-N-T-360
	10	R1/4"	16	20	11	26,5	26	18	38,6	PI16C-10-14-N-T-360
	10	R3/8"	16	20	11,5	27	26	18	41	PI16C-10-38-N-T-360
	10	R1/2"	16	24,5	14	31	26	22	-	PI16C-10-12-N-T-360
	12	R1/4"	19	22,5	11	30	28,5	20	-	PI16C-12-14-N-T-36
	12	R3/8"	19	22,5	11,5	30,5	28,5	20	61,8	PI16C-12-38-N-T-360
	12	R1/2"	19	24,5	14	33,5	28,5	22	71,5	PI16C-12-12-N-T-360
	14	R3/8"	22	22,5	11,5	30,5	32	20	66,2	PI16C-14-38-N-T-360
	14	R1/2"	22	24,5	14	33,5	32	22	74,6	PI16C-14-12-N-T-360

PI16C Szögletes becsavarható csatlakozó idom - Kúpos menet


	Ø	D1	D2	L1	L2	L3	CH	Tömeg [g]	Típus
	4	R1/8"	9	7,8	15	17,5	8	8,1	PI16C-04-18-N-T
	4	R1/4"	9	10	19	17,5	10	13,9	PI16C-04-14-N-T
	6	R1/8"	12	8,2	15,5	20,5	10	13,2	PI16C-06-18-N-T
	6	R1/4"	12	10	19	20,5	10	16,7	PI16C-06-14-N-T
	8	R1/8"	14	7,5	19	22,5	12	19,6	PI16C-08-18-N-T
	8	R1/4"	14	10,5	20	22,5	12	22,6	PI16C-08-14-N-T
	10	R1/4"	16	9,5	22	25	14	27,1	PI16C-10-14-N-T
	10	R3/8"	16	10,8	22,5	25	14	32,1	PI16C-10-38-N-T

PI16 Dugós csatlakozós könyökcsatlakozó


	Ø	L1	L2	D1	D2	Tömeg [g]	Típus
	4	25,7	19,5	4	9,1	14	PI16-04-N
	4	29,7	19,5	6	9,1	15	PI16-04-06-N
	6	25,7	22	4	12	17	PI16-06-04-N
	6	29,7	22	6	12	17	PI16-06-N
	6	29,7	22	8	12	17,5	PI16-06-08-N
	8	29,5	22,5	6	14	20,5	PI16-08-06-N
	8	29,5	22,5	8	14	20,5	PI16-08-N
	10	33,5	26	10	16	30	PI16-10-N




PI17-360 Forgatható könyökös becsavarható csatlakozó idom

	Ø	D1	D2	D3	L1	L2	L3	CH	Tömeg [g]	Típus
	4	G1/8"	9,1	14,5	6,5	17,9	19,5	13	17,3	PI17-04-18-N-360
	6	G1/8"	12	14,5	6,5	17,9	22	13	19,7	PI17-06-18-N-360
	6	G1/4"	12	18	10	22,2	22	16	25,4	PI17-06-14-N-360
	8	G1/8"	14	14,5	6,5	17,7	22,5	13	23,1	PI17-08-18-N-360
	8	G1/4"	14	18	10	22	22,5	16	29,1	PI17-08-14-N-360
	10	G1/4"	16	18	10	23	26	16	35,6	PI17-10-14-N-360
	10	G3/8"	16	22,5	10,5	25	26	20	43,5	PI17-10-38-N-360


PI17 Könyökcsatlakozó

	Ø	D2	L1	Tömeg [g]	Típus
	3	7	12,8	4,5	PI17-03-N
	4	9	17,5	9	PI17-04-N
	6	12	20,5	16,5	PI17-06-N
	8	14	22,5	22	PI17-08-N
	10	16	25	29,5	PI17-10-N
	12	19	26,5	48,5	PI17-12-N
	14	22	31,5	58	PI17-14-N
	16	24	36,5	90,6	PI17-16-N

PI19-360 Forgatható, hosszú könyökös becsavarható csatlakozó idom - Hengeres menet


	Ø	D1	D2	D3	L1	L2	L3	CH	Tömeg [g]	Típus
	4	G1/8"	9,1	14,5	5	29,2	19,5	13	25,6	PI19-04-18-N-0-360
	6	G1/8"	12	14,5	5	32,2	22	13	30,5	PI19-06-18-N-0-360
	6	G1/4"	12	16	6,5	35,7	22	13	30,9	PI19-06-14-N-0-360
	8	G1/8"	14	14,5	5	34	22,5	13	35,7	PI19-08-18-N-0-360
	8	G1/4"	14	18	6,5	37,5	22,5	13	36	PI19-08-14-N-0-360

PI20-360 Forgatható keresztcsatlakozó


	Ø1	Ø2	L1	L2	L3	D1	D2	Tömeg [g]	Típus
	4	4	18,4	39	39	9,1	9,1	31	PI20-04-N-360
	4	6	18,4	39	44	9,1	12	36	PI20-04-06-N-360
	6	6	18	44	44	12	12	41	PI20-06-N-360
	6	8	18	44	45	12	14	46,5	PI20-06-08-N-360
	8	8	18	45	45	14	14	50	PI20-08-N-360




PI21-360 Forgatható T-becsavarható csatlakozó idom - Hengeres menet

	Ø	D1	D2	D3	L1	L2	L3	CH	Tömeg [g]	Típus
	4	G1/8"	9,1	14,5	5	18,2	39	13	20,2	PI21-04-18-N-0-360
	4	G1/4"	9,1	16	6,5	21,7	39	13	23,9	PI21-04-14-N-0-360
	6	G1/8"	12	14,5	5	18	44	13	25,2	PI21-06-18-N-0-360
	6	G1/4"	12	16	6,5	21,5	44	13	29,1	PI21-06-14-N-0-360
	8	G1/8"	14	14,5	5	18	45	13	30,7	PI21-08-18-N-0-360
	8	G1/4"	14	16	6,5	21,5	45	13	34,1	PI21-08-14-N-0-360
	8	G3/8"	14	20	7	25,5	46	16	46,4	PI21-08-38-N-0-360
	10	G1/4"	16	18	6,5	22	52	16	44,4	PI21-10-14-N-0-360
	10	G3/8"	16	20	7	25,5	52	16	49,7	PI21-10-38-N-0-360
	12	G3/8"	19	22,5	7	26	57	20	75,3	PI21-12-38-N-0-360
	12	G1/2"	19	25	8,5	30,5	57	20	82	PI21-12-12-N-0-360

PI21C-360 Forgatható T-becsavarható csatlakozó idom - Kúpos menet

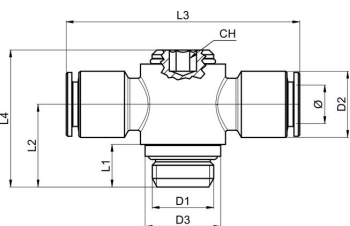
	Ø	D1	D2	D3	L1	L2	L3	CH	Tömeg [g]	Típus
	4	R1/8"	9,1	14,5	7,5	20,2	39	13	21,5	PI21C-04-18-N-T-360
	4	R1/4"	9,1	15,5	11	24,2	39	14	25,6	PI21C-04-14-N-T-360
	6	R1/8"	12	14,5	7,5	20	44	13	26,3	PI21C-06-18-N-T-360
	6	R1/4"	12	15,5	11	24	44	14	30,4	PI21C-06-14-N-T-360
	8	R1/8"	14	14,5	7,5	20	45	13	31,3	PI21C-08-18-N-T-360
	8	R1/4"	14	15,5	11	24	45	14	35,3	PI21C-08-14-N-T-360
	8	R3/8"	14	20	11,5	27	46	18	49,1	PI21C-08-38-N-T-360
	10	R1/4"	16	20	11	26,5	52	18	50	PI21C-10-14-N-T-360
	10	R3/8"	16	20	11,5	27	52	18	51,6	PI21C-10-38-N-T-360
	12	R3/8"	19	22,5	11,5	30,5	57	20	80	PI21C-12-38-N-T-360
	12	R1/2"	19	24,5	14	33,5	57	22	83,5	PI21C-12-12-N-T-360

PI21 T-csatlakozó csatlakozódugóval


	Ø	L1	L2	D1	D2	Tömeg [g]	Típus
	4	25,7	39	4	9	18,5	PI21-04-N
	4	29,7	39	6	9	19,5	PI21-04-06-04-N
	6	29,5	44	6	12	24,5	PI21-06-N
	6	29,5	44	8	12	24,5	PI21-06-08-06-N
	8	29,5	45	8	14	29	PI21-08-N
	8	33,5	46	10	14	38,5	PI21-08-10-08-N
	10	33,5	52	10	16	41	PI21-10-N




PI22-360 Forgatható T-becsavarható csatlakozó idom - Hengeres menet

	Ø	D1	D2	D3	L1	L2	L3	L4	CH	Tömeg [g]	Típus
	4	M5x0,8	9	10	4	11	38	19,1	3	13,8	PI22-04-M5-N-0-360
	4	G1/8"	9	14	5	15	41	25,5	4	27,4	PI22-04-18-N-0-360
	6	M5x0,8	12	10	4	11	43	19,1	3	19,9	PI22-06-M5-N-0-360
	6	G1/8"	12	14	5	15	45	25,5	4	32,1	PI22-06-18-N-0-360
	6	G1/4"	12	18	6,5	17,5	48	29	5	45,8	PI22-06-14-N-0-360
	8	G1/8"	14	14	5	15	47	25,5	4	34,1	PI22-08-18-N-0-360
	8	G1/4"	14	18	6,5	17,5	49	29	5	46,5	PI22-08-14-N-0-360
	10	G1/4"	16	18	6,5	17,5	54	29	5	55,2	PI22-10-14-N-0-360
	10	G3/8"	16	22	7	19,5	58	32,5	6	72,4	PI22-10-38-N-0-360
	12	G3/8"	19	22	7	19,5	59	32,5	6	79	PI22-12-38-N-0-360
	12	G1/2"	19	27	8,5	24	63	39,6	8	124,7	PI22-12-12-N-0-360


PI23 Y-csatlakozó

	Ø1	Ø2	D2	L1	L2	Tömeg [g]	Típus
	3	3	6,8	25	7,5	8,1	PI23-06-N
	4	4	9	29,5	9,5	14,3	PI23-04-N
	6	6	12	36,5	12,5	32,7	PI23-06-N
	6	4	12	34,1	12,5	36,1	PI23-04-06-N
	8	8	14	37,5	14,5	44,1	PI23-08-N
	8	6	14	37,5	14,5	51,1	PI23-06-08-N
	10	10	16	44,5	16,5	62,7	PI23-10-N
	10	8	16	44	16,5	74,9	PI23-08-10-N
	12	12	19	49	19,5	95,8	PI23-12-N

PI23-360 Forgatható Y-csatlakozó

	Ø1	Ø2	L1	L2	L3	D1	D2	Tömeg [g]	Típus
	4	4	18,4	39	19,5	9,1	9,1	27	PI23-04-N-360
	4	6	18,4	39	22	9,1	12	29,5	PI23-04-06-N-360
	6	6	18,2	44	22	12	12	34,5	PI23-06-N-360
	6	8	18	44	22,5	12	14	37,5	PI23-06-08-N-360
	8	8	18	45	22,5	14	14	42	PI23-08--N-360

PI24-360 Forgatható T-becsavarható csatlakozó idom - Hengeres menet

	Ø	D1	D2	D3	L1	L2	L3	L4	CH	Tömeg [g]	Típus
	4	G1/8"	9,1	14,5	5	18,2	19,5	37,7	13	20,5	PI24-04-18-N-0-360
	4	G1/4"	9,1	16	6,5	21,7	19,5	41,2	13	24	PI24-04-14-N-0-360
	6	G1/8"	12	14,5	5	18,2	22	40,2	13	26	PI24-06-18-N-0-360
	6	G1/4"	12	16	6,5	21,7	22	43,7	13	29,5	PI24-06-14-N-0-360
	8	G1/8"	14	14,5	5	18	22,5	40,5	13	30	PI24-08-18-N-0-360
	8	G1/4"	14	16	6,5	21,5	22,5	44	13	33,5	PI24-08-14-N-0-360
	10	G1/4"	16	16	6,5	22	26	48	16	44	PI24-10-14-N-0-360
	10	G3/8"	16	20	7	25,5	26	51,5	16	49	PI24-10-38-N-0-360
	12	G3/8"	19	22,5	7	26	28,5	54,5	20	73	PI24-12-38-N-0-360
	12	G1/2"	19	25	8,5	30,5	28,5	59	20	77	PI24-12-12-N-0-360



PI24C-360 Forgatható T-becsavarható csatlakozó idom - Kúpos menet

	Ø	D1	D2	D3	L1	L2	L3	L4	CH	Tömeg [g]	Típus
	4	R1/8"	9,1	14,5	7,5	20,2	19,5	39,5	13	22	PI24C-04-18-N-T-360
	4	R1/4"	9,1	15,5	11	24,2	19,5	43,7	14	25,5	PI24C-04-14-N-T-360
	6	R1/8"	12	14,5	7,5	20,2	22	42,2	13	27,5	PI24C-06-18-N-T-360
	6	R1/4"	12	15,5	11	24,2	22	46,2	14	31	PI24C-06-14-N-T-360
	8	R1/8"	14	14,5	7,5	20	22,5	42,5	13	31	PI24C-08-18-N-T-360
	8	R1/4"	14	15,5	11	24	22,5	46,5	14	35	PI24C-08-14-N-T-360
	10	R1/4"	16	20	11	26,5	26	52,5	18	50	PI24C-10-14-N-T-360
	10	R3/8"	16	20	11,5	27	26	53	18	51	PI24C-10-38-N-T-360
	12	R3/8"	19	22,5	11,5	30,5	28,5	59	20	75	PI24C-12-38-N-T-360
	12	R1/2"	19	24,5	14	33,5	28,5	62	22	83,5	PI24C-12-12-N-T-360

PI24 L-csatlakozó dugaszolható csatlakozócsonkkal

	Ø	L1	L2	L3	D1	D2	Tömeg [g]	Típus
	4	25,	19,5	45,2	4	9,1	18,5	PI24-04-N
	4	29,7	19,5	49,2	6	9,1	20	PI24-04-06-04-N
	6	29,7	22	51,7	6	12	25	PI24-06-N
	6	29,7	22	51,7	8	12	25,5	PI24-06-08-06-N
	8	29,5	22,5	52	8	14	30	PI24-08-N
	10	33,5	26	59,5	10	16	41	PI24-10-N

PI27 Átmenő csatlakozó idom

	Ø	D2	L1	L2 max	CH	Tömeg [g]	Típus
	3	M8x0,75	22,5	9,5	12	14,5	PI27-03-N
	4	M12x1	28	11	16	23,5	PI27-04-N
	6	M14x1	34	16	18	33	PI27-06-N
	8	M16x1	34	16	20	39,5	PI27-08-N
	10	M18x1	39	19	22	51,5	PI27-10-N
	12	M20x1	41	20	24	60	PI27-12-N

PI29 T-idomcsatlakozó

	Ø1	Ø2	D1	D2	L1	L2	Tömeg [g]	Típus
	3	3	7	7	12,8	25,6	5,6	PI29-03-N
	4	4	9	9	17,5	35	12,5	PI29-04-N
	6	6	12	12	20	40	22,5	PI29-06-N
	6	4	12	9	18	40	-	PI29-06-04-N
	8	8	14	14	21	42	28	PI29-08-N
	8	6	14	12	20,5	42	-	PI29-08-06-N
	10	10	16	16	24,5	49	39,2	PI29-10-N
	10	8	16	14	23	49	-	PI29-10-08-N
	12	12	19	19	26	52	61,3	PI29-12-N
	12	10	19	16	26	52	-	PI29-12-10-N
	14	14	22	22	30,5	61	77,1	PI29-14-N
	16	16	24	24	36,5	73	124	PI29-16-N




PI35 L-gyűrűdarab

The image shows a technical drawing of a mechanical component, likely a valve or fitting. It consists of two views: a side view and a cross-sectional view. The side view shows the overall length and diameter of the component. The cross-sectional view shows the internal structure, including a central bore and a flange. Dimensions are labeled as follows: L1 is the total length, L2 is the length of the main body, D1 is the diameter of the central bore, D2 is the diameter of the flange, and D3 is the diameter of the base.

Ø	D1	D2	D3	L1	L2	Tömeg [g]	Típus
4	M5	9,1	10	9	18,5	7,7	PI35-04-M5-N
4	M5	9,1	10	10	18,5	6,6	PI35-04-M5-N-M*
4	G1/8"	9,1	14	15	20,5	13,5	PI35-04-18-N
6	M5	12	10	9	21,5	10,9	PI35-06-M5-N
6	M5	12	10	10	21,5	10,1	PI35-06-M5-N-M*
6	G1/8"	12	14	15	22,5	15,5	PI35-06-18-N
6	G1/4"	12	18	17	24	21,6	PI35-06-14-N
8	G1/8"	14	14	15	23,5	16,7	PI35-08-18-N
8	G1/4"	14	18	17	24,5	22,8	PI35-08-14-N
8	G3/8"	14	22	20	26,5	32,7	PI35-08-38-N
10	G1/4"	16	18	17	27	27,2	PI35-10-14-N
10	G3/8"	16	22	20	29	34,5	PI35-10-38-N
12	G3/8"	19	22	20	29,5	38,8	PI35-12-38-N
12	G1/2"	19	26	24	31,5	56,9	PI35-12-12-N

*számára Fojtószelep forgócsatlakozással és Fojtó-visszacsapó szelep forgócsatlakozáshoz

PI36 T-gyűrűs csatlakozóelem



Ø	D1	D2	D3	L1	L2	Tömeg [g]	Típus
4	M5	9	10	9	37	10,9	PI36-04-M5-N
4	G1/8"	9	14	15	41	18	PI36-04-18-N
6	G1/8"	12	14	15	45	23	PI36-06-18-N
6	G1/4"	12	18	17	48	28,7	PI36-06-14-N
8	G1/8"	14	14	15	47	25,3	PI36-08-18-N
8	G1/4"	14	18	17	49	29,7	PI36-08-14-N
8	G3/8"	14	22	20	53	42,5	PI36-08-38-N
10	G1/4"	16	18	17	54	37,9	PI36-10-14-N
10	G3/8"	16	22	20	58	44,5	PI36-10-38-N
12	G3/8"	19	22	20	59	51,3	PI36-12-38-N
12	G1/2"	19	27	24	63	67,2	PI36-12-12-N


PI38 Menetes csatlakozódugó

A technical drawing of a PI38 threaded connector. The drawing shows a side view of the component with various dimensions labeled. L1 is the height of the base flange. L2 is the height of the main body. D1 is the diameter of the base flange. D2 is the diameter of the main body. D3 is the diameter of the threaded section. CH is the height of the threaded section. The drawing is a black and white line drawing.


Ø D2 [mm]	D1	D3	L1	L2	CH	Tömeg [g]	Típus
4	M5x0,8	10	4	26	9	3,2	PI38-04-M5-N-0
4	G1/8"	14,5	5	28	13	7,2	PI38-04-18-N-0
4	G1/4"	16	6,5	29,5	16	12,4	PI38-04-14-N-0
6	M5x0,8	10	4	28	9	5,9	PI38-06-M5-N-0
6	G1/8"	14,5	5	30	13	8,5	PI38-06-18-N-0
6	G1/4"	16	6,5	32,5	16	13,7	PI38-06-14-N-0
8	G1/8"	14,5	5	31	13	9,4	PI38-08-18-N-0
8	G1/4"	16	6,5	33,5	16	14,5	PI38-08-14-N-0
10	G1/4"	16	6,5	34,5	16	15,5	PI38-10-14-N-0
10	G3/8"	20	7	35	20	22	PI38-10-38-N-0
12	G3/8"	20	7	38	20	23,6	PI38-12-38-N-0
12	G1/2"	25	8,5	39,5	25	38	PI38-12-12-N-0




PI38 Csatlakozócsapka

	D1	L1	Tömeg [g]	Típus
	4	35	2,7	PI38-04-N
	6	40	5,1	PI38-06-N
	8	42	8	PI38-08-N
	10	50	11,8	PI38-10-N
	12	53	15,3	PI38-12-N
	14	54	18,8	PI38-12-N

PI40 Zárócsapka

	D1	L1	Tömeg [g]	Típus
	3	20	1	PI40-03-N
	4	25	2,3	PI40-04-N
	6	25	3,7	PI40-06-N
	8	30	7,2	PI40-08-N
	10	35	11,8	PI40-10-N
	12	40	18,2	PI40-12-N
	14	40	26,2	PI40-14-N
	16	40	32,5	PI40-16-N

PI85-360 Forgatható könyök becsavarható csatlakozó idom 45° - Hengeres menet

	Ø	D1	D2	D3	L1	L2	L3	CH	Tömeg [g]	Típus
	6	G1/8"	12	12,8	5	21	21	13	-	PI85-06-18-N-0-360
	6	G1/4"	12	16	6,5	24,5	21	13	-	PI85-06-14-N-0-360
	8	G1/8"	14	12,8	5	21	21	13	-	PI85-08-18-N-0-360
	8	G1/4"	14	16	6,5	24,5	21	13	-	PI85-08-14-N-0-360
	10	G1/4"	16	16	6,5	23	25	13	-	PI85-10-14-N-0-360
	10	G3/8"	16	20	7	26,5	25	16	-	PI85-10-38-N-0-360
	12	G3/8"	20	20	7	26	25	16	-	PI85-12-38-N-0-360
	12	G1/2"	20	25	8,5	30,5	25	20	-	PI85-12-12-N-0-360

Az ábrák nem kötelező érvényűek

A konstrukció, a méretek és az anyagok változtatásának joga fenntartva

Pneumatika / Pneumatikus csatlakozók és kuplungok / Push-in csatlakozók / push-in csatlakozók - nikkelezett sárgaréz nyomás -0,99...20bar

